

ECO-FRIENDLY ANCHORING SOLUTIONS

MULTI-SOIL ANCHORS

From Silt to Rock

SOLID ROD ANCHORS

with a variable-diameter casing


- Attachment with a:
 - Welded eye
 - Plate
- Anchor for:
 - Multi-directional tensile stresses
 - High compressive stresses
- Dimensions on request according to the application

HOLLOW ROD ANCHORS

- These anchors:
 - Can be extended in 3-metre lengths
 - Support grouting for the rock or additional stabilisation
- These anchors are used for soils of variable consistency with deep rocky plates.

Depending on the type of soil, a boring attachment may be fixed to the rod:

- Either a penetrating disc
- Or a sacrificial drill bit

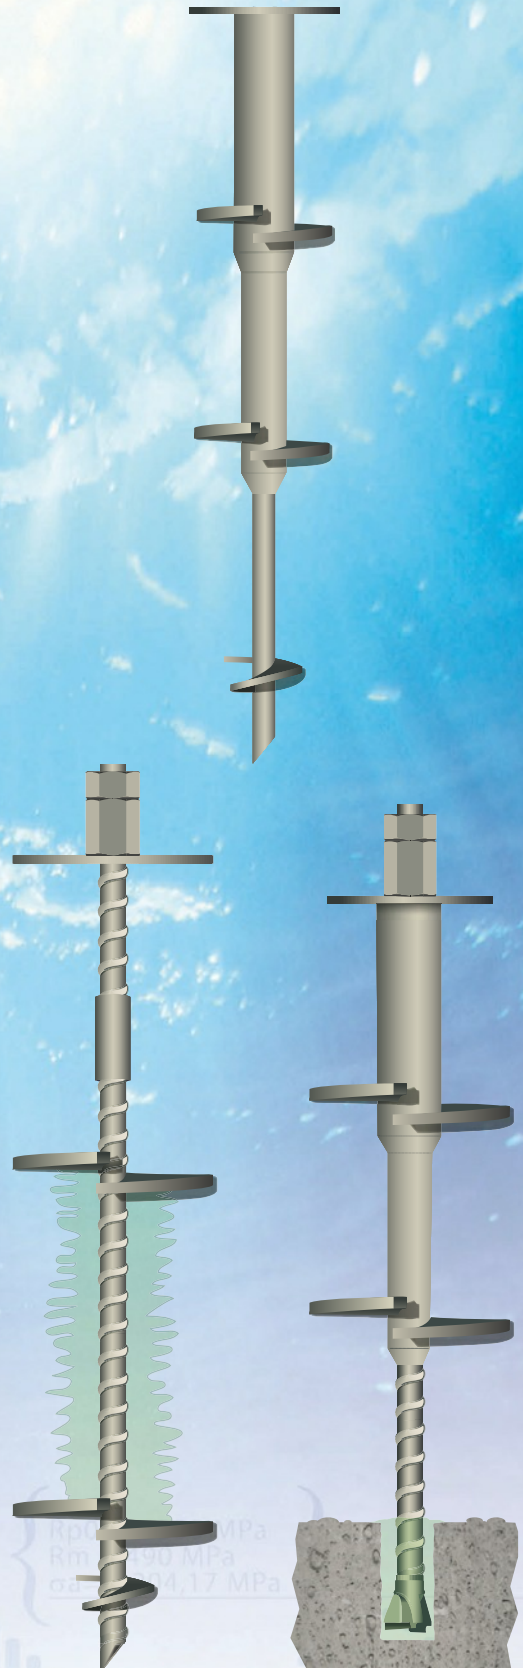

ANCHORING IS OUR BUSINESS