

STANDARD ANCHORS


For loose to compact soil

SMOOTH SOLID ROD ANCHORS

- Attachment with a welded eye from the light range to the heavy-duty range.
- Single helix
dimensions from 750x18 / 150x4
to 1500x35 / 250x12
- Double hélix
dimensions from 1000x20 / (150x4) x2
to 2000x35 / (250x12) x2

THREADED SOLID ROD ANCHORS

- Attachment with an eye welded to a nut or with a plate featuring a nut and lock nut.
- These anchors can be extended in 3-metre lengths from the light range to the heavy-duty
- Simple Helix
dimensions from 1000x20 / 150x4
to 1500x32 / 250x12
- Double hélix
dimensions from 1250x20 / (150x4) x2
to 2000x40 / (250x12) x2

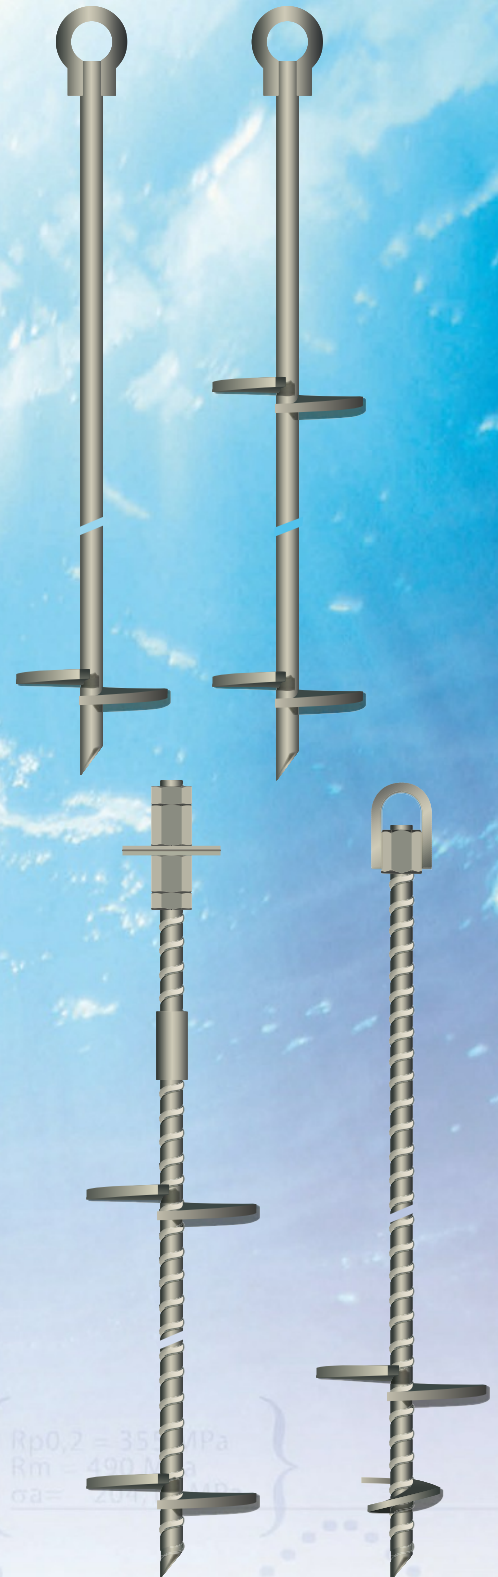

$R_{p0,2} = 460 \text{ MPa}$
 $R_m = 610 \text{ MPa}$
 $\sigma_a = 2047$

$R_{p0,2} = 355 \text{ MPa}$
 $R_m = 490 \text{ MPa}$
 $\sigma_a = 2047$

ANCHORING IS OUR BUSINESS